



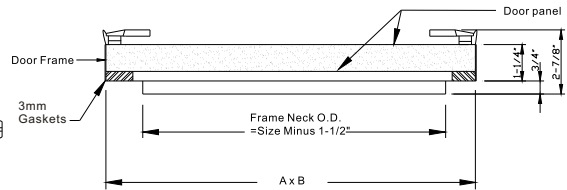

DUCT ACCESS DOOR



APPLICATION

Duct access door offer quick, easy and economical installation wherever duct access is needed. It can be either hinged type or wholly removable. Also available with retaining chain, other thickness and sizes, upon request.

CONSTRUCTION

- DOOR PANEL: 0.6mm Galvanized Steel, double skin type.
- FRAME: 0.8mm Galvanized Steel, also available in Stainless Steel, upon request.
- INSULATION: 1" Fiberglass.

STANDARD SIZES

Size	Dim. A Width	Dim. B Height	Frame Neck O.D.	No. of Camlock	No. of Handle
6 x 6	6"	6"	4-1/2" x 4-1/2"	2	1
8 x 8	8"	8"	6-1/2" x 6-1/2"	2	1
10 x 10	10"	10"	8-1/2" x 8-1/2"	2	1
12 x 12	12"	12"	10-1/2" x 10-1/2"	2	1
14 x 14	14"	14"	12-1/2" x 12-1/2"	2	1
16 x 16	16"	16"	14-1/2" x 14-1/2"	4	1
18 x 18	18"	18"	16-1/2" x 16-1/2"	4	1
20 x 20	20"	20"	18-1/2" x 18-1/2"	4	1
24 x 24	24"	24"	22-1/2" x 22-1/2"	4	2
24 x 36	24"	36"	22-1/2" x 34-1/2"	6	2

To maintain Luen Ming policy of continuous product improvement. we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.